

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
31 December 2003 (31.12.2003)


PCT

(10) International Publication Number  
**WO 2004/000481 A1**

- (51) International Patent Classification<sup>7</sup>: **B21D 51/26**
- (21) International Application Number:  
PCT/EP2003/006239
- (22) International Filing Date: 13 June 2003 (13.06.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
02254347.4 21 June 2002 (21.06.2002) EP
- (71) Applicant (for all designated States except LS, US):  
**CROWN CORK & SEAL TECHNOLOGIES CORPORATION** [US/US]; 11535 S. Central Avenue, Alsip,  
IL 60803-2599 (US).
- (71) Applicant (for LS only): **CARNAUDMETALBOX PLC**  
[GB/GB]; Downsview Road, Wantage, Oxfordshire OX12  
9BP (GB).
- (72) Inventor; and  
(75) Inventor/Applicant (for US only): **CLAYDON, Paul,**  
**Charles** [GB/GB]; 35 Elizabeth Drive, Wantage, Oxford-  
shire OX12 9YA (GB).
- (74) Agent: **RATLIFF, Ismay, Hilary;** Group Intellectual  
Property, CarnaudMetalbox plc, Downsview Road, Wan-  
tage, Oxfordshire OX12 9BP (GB).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,  
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,  
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,  
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,  
MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD,  
SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US,  
UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,  
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,

[Continued on next page]

(54) Title: REFORM ROLLERS

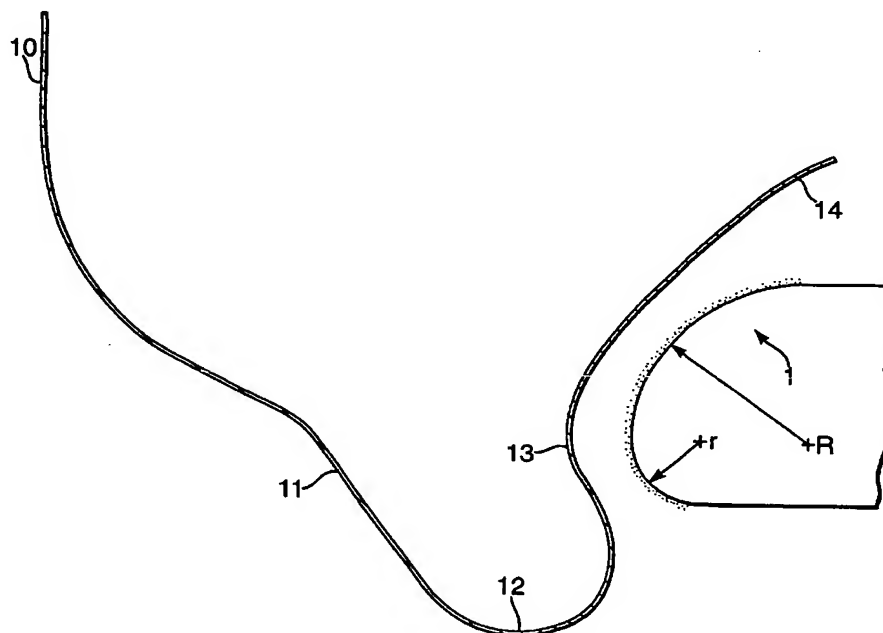

(57) Abstract: Reform rollers for use in internal or external base reforming of can bodies have a textured surface which control the depth of the dome of the can base and provide greater process stability than is achieved with known smooth rollers. One example of textured surface finish provided by spark erosion has been shown to have much greater consistency of dome reversal pressure, dome growth and dome depth.

WO 2004/000481 A1



SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

— *with international search report*

This invention relates to reform rollers and, in particular to rollers for use in internal or external base reforming of can bodies.

Can bodies for containing beverage conventionally  
5 comprise a cylindrical side wall and integral base. The base is substantially thicker than the wall ironed side wall and has an upwardly domed central portion and an inner wall extending downwardly from the dome to a stand bead which, in turn, extends upwardly and outwardly to  
10 the side wall of the can body. Such beverage can bodies are conventionally made from aluminium alloy or tinplate.

The domed shape of the beverage can body is so designed in order to withstand internal pressure and to resist deformation such as outward bulging of the base.  
15 It has been found that by reforming the inner wall of the base either indirectly, by applying an external, or directly using an internal roller, improved dome reversal pressures are obtained. Further advantages of the reformed base profile include greater resistance to  
20 deformation, particularly when dropped, and control of overall can height during pasteurisation, handling or transportation.

Although known base reforming generally improves a can's abuse and buckle resistance, there is a great  
25 degree of variation in can performance between cans. This variation can lead to unacceptable mean dome depth, dome growth and/or dome reversal pressure. In particular, it has been found that there is instability in the process run with ingoing cans typically showing initially a  
30 relatively shallow reform bead in the reform profile and significantly greater dome depth in comparison with the bead and dome depth of cans later in the process run. The

process only seems to stabilise after around 50 cans have undergone the reforming process.

EP-0,482,586 describes the use of an additional panel which is provided on the inner wall of the can base  
5 between the reform bead and the dome. Whilst this approach is said to improve pressure performance by increasing dome reversal pressure, the additional panel may lead to a loss of can volume due to excessive dome depth. Furthermore it does not address process  
10 instability over the course of the reform run.

This invention seeks to overcome the stability problem and to produce a can body which not only meets the industry specified performance criteria, but also does so on a consistent basis with minimal variation  
15 within process runs.

According to the present invention, there is provided an apparatus for reforming the base of a can body, the can body having a substantially cylindrical side wall and an integral base, the base including an  
20 outer annular wall, a support portion, an inner wall and a central dome, the apparatus including: one or more reform rollers; an actuator for moving the or each roller from a first position adjacent the base of the can to a second position in which the roller contacts either the  
25 outer annular wall or the inner wall of the can base in order to reform at least the inner wall of the can base; and in which the or each reform roller has a textured surface.

In one embodiment, the textured surface has a non-  
30 periodic profile with a lay which may be either

particulate or multi-directional. Alternatively, a "periodic" profile such as machined grooves, knurling or similar textured profile could be used.

5 In one embodiment, the textured surface of each roller is a spark eroded finish, a carbide deposited finish or a combination of these. Alternatively, the textured surface may be achieved through blasting with angular irregularly shaped or spherically shaped abrasive particles, such as a sand or aqua blasted finish.

10 The roller itself is usually formed from a material having a hard surface above 45 HRC (Rockwell hardness scale C). Hardened BD2 (60Rc) steel is a readily available material which will hold the textured surface with acceptable wear rate. Other steels, tool steels and  
15 materials such as tungsten carbides, ceramics and even polycrystalline synthetic or cubic boron nitride diamonds could be used, since these too have the required minimum 45 HRC hardness.

The inventor has found that by providing a textured  
20 and therefore "rough" finish to the roller, dome growth is consistently controlled to within the typical customer requirement of  $0.03" \pm 0.02"$  ( $0.762 \pm 0.51$  mm) maximum permanent (non-recoverable) growth at 90 psi, without the provision of any additional panel (such as that used in  
25 EP-0,482,586), or excessive dome depth.

The apparatus is preferably for internal base reforming and each roller has a thickness which is at least 25% of the height of the inner wall.

The roller for the internal base reform may have a  
30 first radius which, in use, is at the upper end of the

region of contact between the roller and the inner wall and a second radius which is at the lower end of the region of contact, and in which the upper radius is larger than the lower radius.

5        According to a further aspect of the present invention there is provided a method of reforming the base of a can body having a substantially cylindrical side wall and an integral base, and the base including an outer annular wall, a support portion, an inner wall and  
10   a central dome, the method comprising: moving one or more reform rollers from a first position adjacent the base of the can to a second position in which the or each roller contacts either the outer annular wall or the inner wall of the can base in order to reform at least the inner  
15   wall of the can base; and controlling the depth of the dome by using reform rollers which have a textured surface.

Preferred embodiments of the invention will now be described, by way of example only, with reference to the  
20   drawings, in which:

Figure 1 is a side section of an internal base reforming apparatus;

Figure 2 is a side section of a reform roller according to the invention;

25        Figure 3 is a graph of dome reversal for rollers having smooth and textured finishes;

Figure 4 is a graph of dome growth variation at 90 psi for rollers having smooth and textured finishes; and

30        Figure 5 is a graph of dome depth for rollers having smooth and textured finishes.

Figures 1a and 1b show side perspective and sectioned view of the reforming apparatus. The reform roller 1 is mounted on a chuck 2. Lateral and rotational movement of the roller, and therefore the profile formed on the internal wall of the can base are dictated by the eccentricity of shaft 3 and the shape of cam 4 which is tracked by cam follower 5.

Figure 2 shows the profile of a reform roller 1 for internal base reforming of a can body. The can body (shown in partial section) has a cylindrical side wall 10, outer wall 11, stand bead 12, inner wall 13 and dome 14. The roller has an upper radius  $R$  which, as shown, is adjacent the upper end of the inner wall 13 of the can. The lower radius  $r$  of the roller is typically smaller as this has been found to provide the optimum profile of base reform.

Whilst known rollers are typically of the smooth "carbide insert" type, the roller of the present invention is of BD2 hardened (60Rc) tool steel and has a textured surface produced by spark erosion. This finish is typically 25 Rz DIN to 30 Rz DIN as measured with a Talysurf stylus type measuring instrument, where the number units are microns. Alternative finishes such as sand blasting are also possible, although these have a lower roughness value. Finer or coarser finishes in the range of 10 Rz DIN to 60 Rz DIN and 0.8 Ra to 25 Ra are also possible within the scope of the present invention, although the coarser finishes are preferred for the present invention.

The graph of figure 3 represents dome reversal pressures obtained from two batches of 27 aluminium beverage cans after internal base reforming using (i) a smooth carbide roller and (ii) a spark eroded (textured) roller. Whilst all cans reformed using the spark eroded roller consistently achieved dome reversal at pressures higher than the minimum industry specification of 100 psi, cans which were reformed using smooth carbide rollers initially reversed at unacceptably low pressures. Furthermore, it is clear that by reforming the can base with a textured roller rather than a smooth roller, not only is the mean dome reversal pressure higher (105.11 psi and 103.078 psi respectively), but the variation between samples is significantly less. This can readily be seen from figure 3, in which for a smooth roller, the minimum dome reversal pressure recorded was 97.02 psi and the maximum was 107.604 psi. In figure 3 for the textured roller, on the other hand, the minimum reversal pressure was 101.283 psi and the maximum was 108.192 psi.

Any increase in the height of the dome (dome "depth") during base reforming should be kept to a minimum as this will affect the capacity of the can and therefore the volume of beverage which can be contained. One current industry specification for dome growth is  $0.03" \pm 0.02"$  ( $0.762 \pm 0.508$  mm) maximum permanent (non-recoverable) growth at 90 psi and there is a desire to limit this further. This specification for maximum dome growth is indicated on the graph of figure 4 by a solid line and the tolerances by dotted lines. The dome growth was measured for 27 cans at 90 psi after internal base



reforming using (i) a smooth carbide deposited roller and  
(ii) a spark eroded (textured) roller (see figure 4).  
Dome growth for cans reformed using a textured roller was  
consistently within the range of tolerances specified  
5 above whereas 3 samples reformed with the smooth roller  
had unacceptably high dome growth and mean dome growth  
for cans which were reformed using the smooth carbide  
roller was an order of magnitude greater than those  
reformed using a textured roller. It is therefore clear  
10 that by using a textured roller, dome growth is kept to a  
minimum without the need for any change in reform profile  
or the introduction of additional panels during  
reforming.

A further advantage of the present invention is  
15 immediately apparent from the graph of figure 5 which  
shows the actual dome depth obtained for a reform run of  
100 cans. Once again, the results for cans reformed using  
a smooth carbide roller show much greater variability  
than those for cans reformed using a textured spark  
20 eroded roller, particularly for the initial set of cans  
reformed. In both runs the dome depth settled to around  
the same level, initial dome depths for cans reformed  
with a textured roller demonstrate significantly less  
variability than do those reformed with a smooth roller.  
25 In the latter case, it took a significantly greater  
number of samples before the dome depths settled.

Dome growth, dome reversal pressure and height at  
which cans failed (by splitting or dome reversal) has  
been assessed for reforming with differing textured  
30 finishes such as wet or dry spark eroded, wet or dry

combined spark eroded and carbide deposited, dry carbide deposited, Armourcote, PVO nitride, sand blasted, aqua blasted, grit blasted and combinations of these last three. All cans passed the enamel rater test for lacquer  
5 integrity. Whilst performance of all cans which have been reformed using textured rollers is acceptable and is considered to be within the scope of the present invention, greater consistency of results and process stability, in particular dome depth variation, has been  
10 found with rougher rollers such as those which have been spark eroded.

CLAIMS

1. An apparatus for reforming the base of a can body,  
the can body having a substantially cylindrical side wall  
5 and an integral base, and the base including an outer  
annular wall, a support portion, an inner wall and a  
central dome, the apparatus comprising:  
    one or more reform rollers;  
    an actuator for moving the or each roller from a  
10 first position adjacent the base of the can to a second  
position in which the roller contacts either the outer  
annular wall or the inner wall of the can base in order  
to reform at least the inner wall of the can base;  
    and in which the or each reform roller has a  
15 textured surface.
2. An apparatus according to claim 1, in which the  
textured surface has a non-periodic profile with a lay  
which is either particulate or multi-directional.  
20
3. An apparatus according to claim 1 or claim 2, in  
which the textured surface of each roller is a spark  
eroded finish, a carbide deposited finish or a  
combination of these.  
25
4. An apparatus according to claim 1 or claim 2, in  
which the textured surface of each roller is a sand or  
aqua blasted finish.

5. An apparatus according to any one of claims 1 to 4, in which the apparatus is for internal base reforming and each roller has a thickness which is at least 25% of the height of the inner wall.

5

6. An apparatus according to claim 5, in which the roller has a first radius which, in use, is at the upper end of the region of contact between the roller and the inner wall and a second radius which is at the lower end  
10 of the region of contact, and in which the upper radius is larger than the lower radius.

7. A method of reforming the base of a can body, the can body having a substantially cylindrical side wall and  
15 an integral base, and the base including an outer annular wall, a support portion, an inner wall and a central dome, the method comprising:

moving one or more reform rollers from a first position adjacent the base of the can to a second  
20 position in which the or each roller contacts either the outer annular wall or the inner wall of the can base in order to reform at least the inner wall of the can base; and

controlling the depth of the dome by using reform  
25 rollers which have a textured surface.

ABSTRACT

REFORM ROLLERS

5 Reform rollers for use in internal or external base  
reforming of can bodies have a textured surface which  
control the depth of the dome of the can base and provide  
greater process stability than is achieved with known  
smooth rollers. One example of textured surface finish  
10 provided by spark erosion has been shown to have much  
greater consistency of dome reversal pressure, dome  
growth and dome depth.

(Figure 2)

15

Fig.1a.

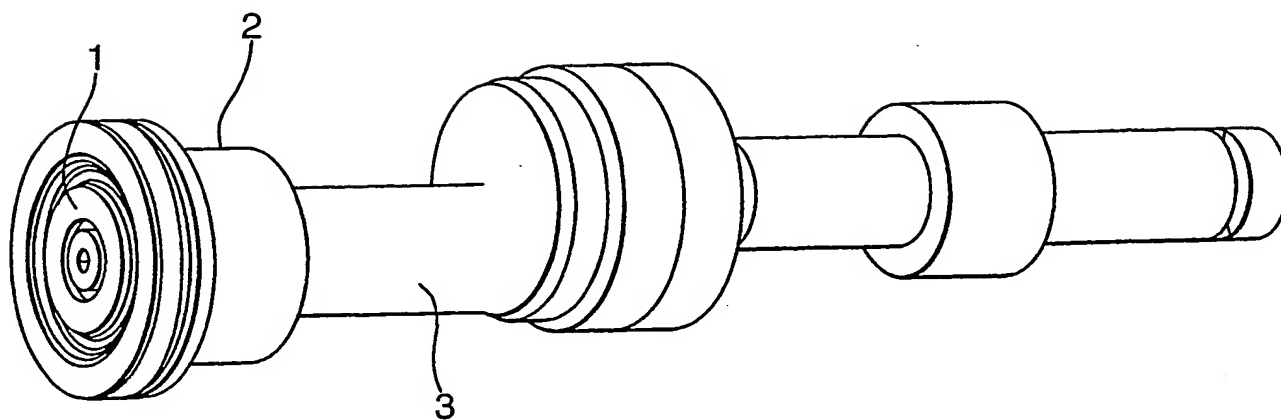


Fig.1b.



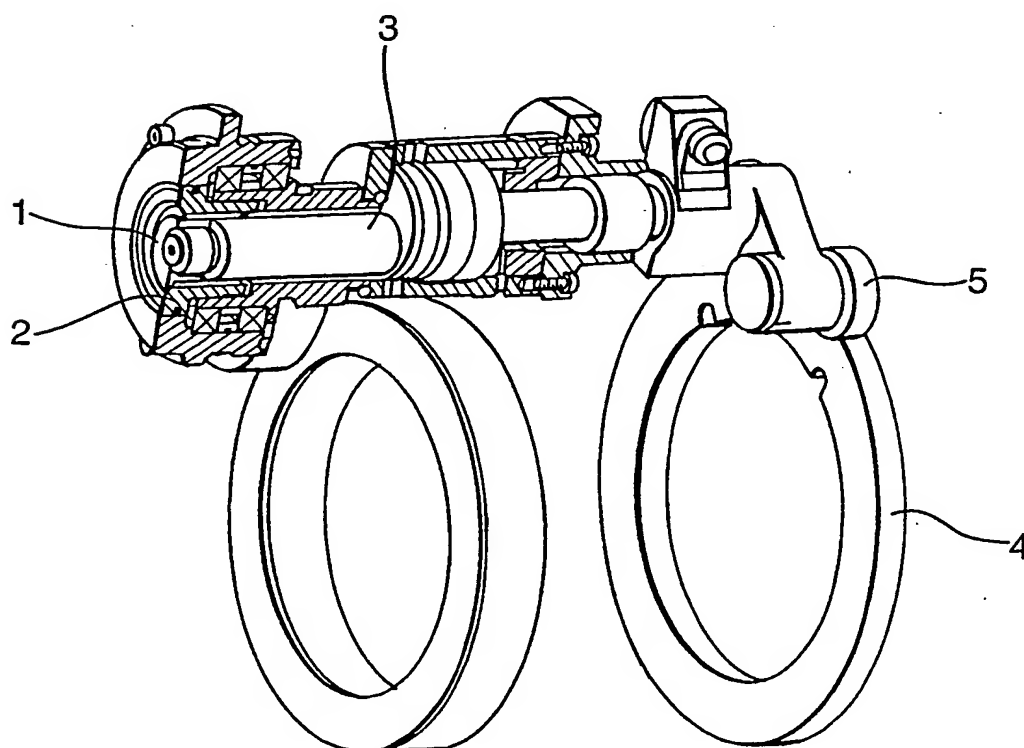


Fig.2.

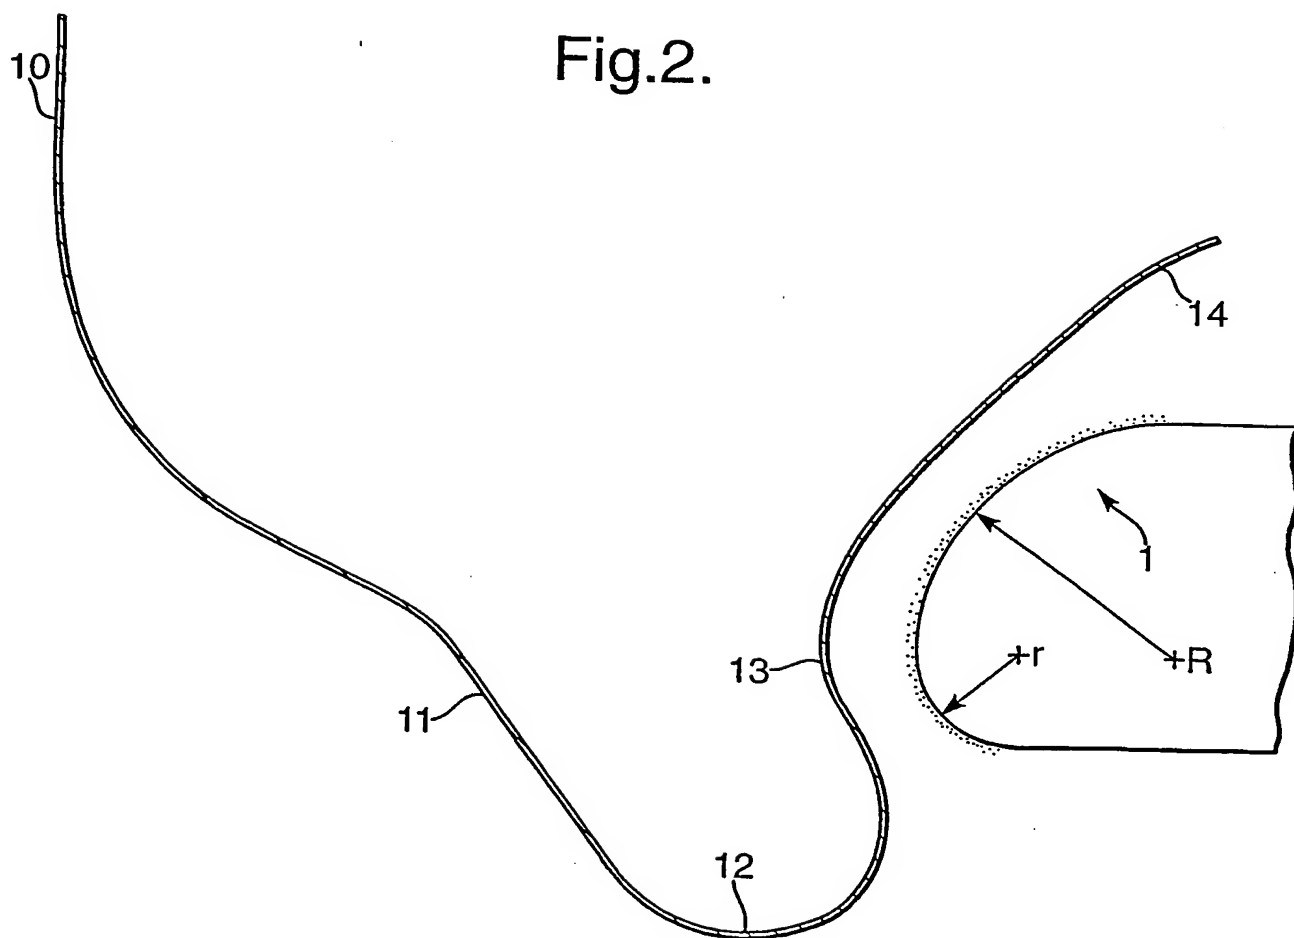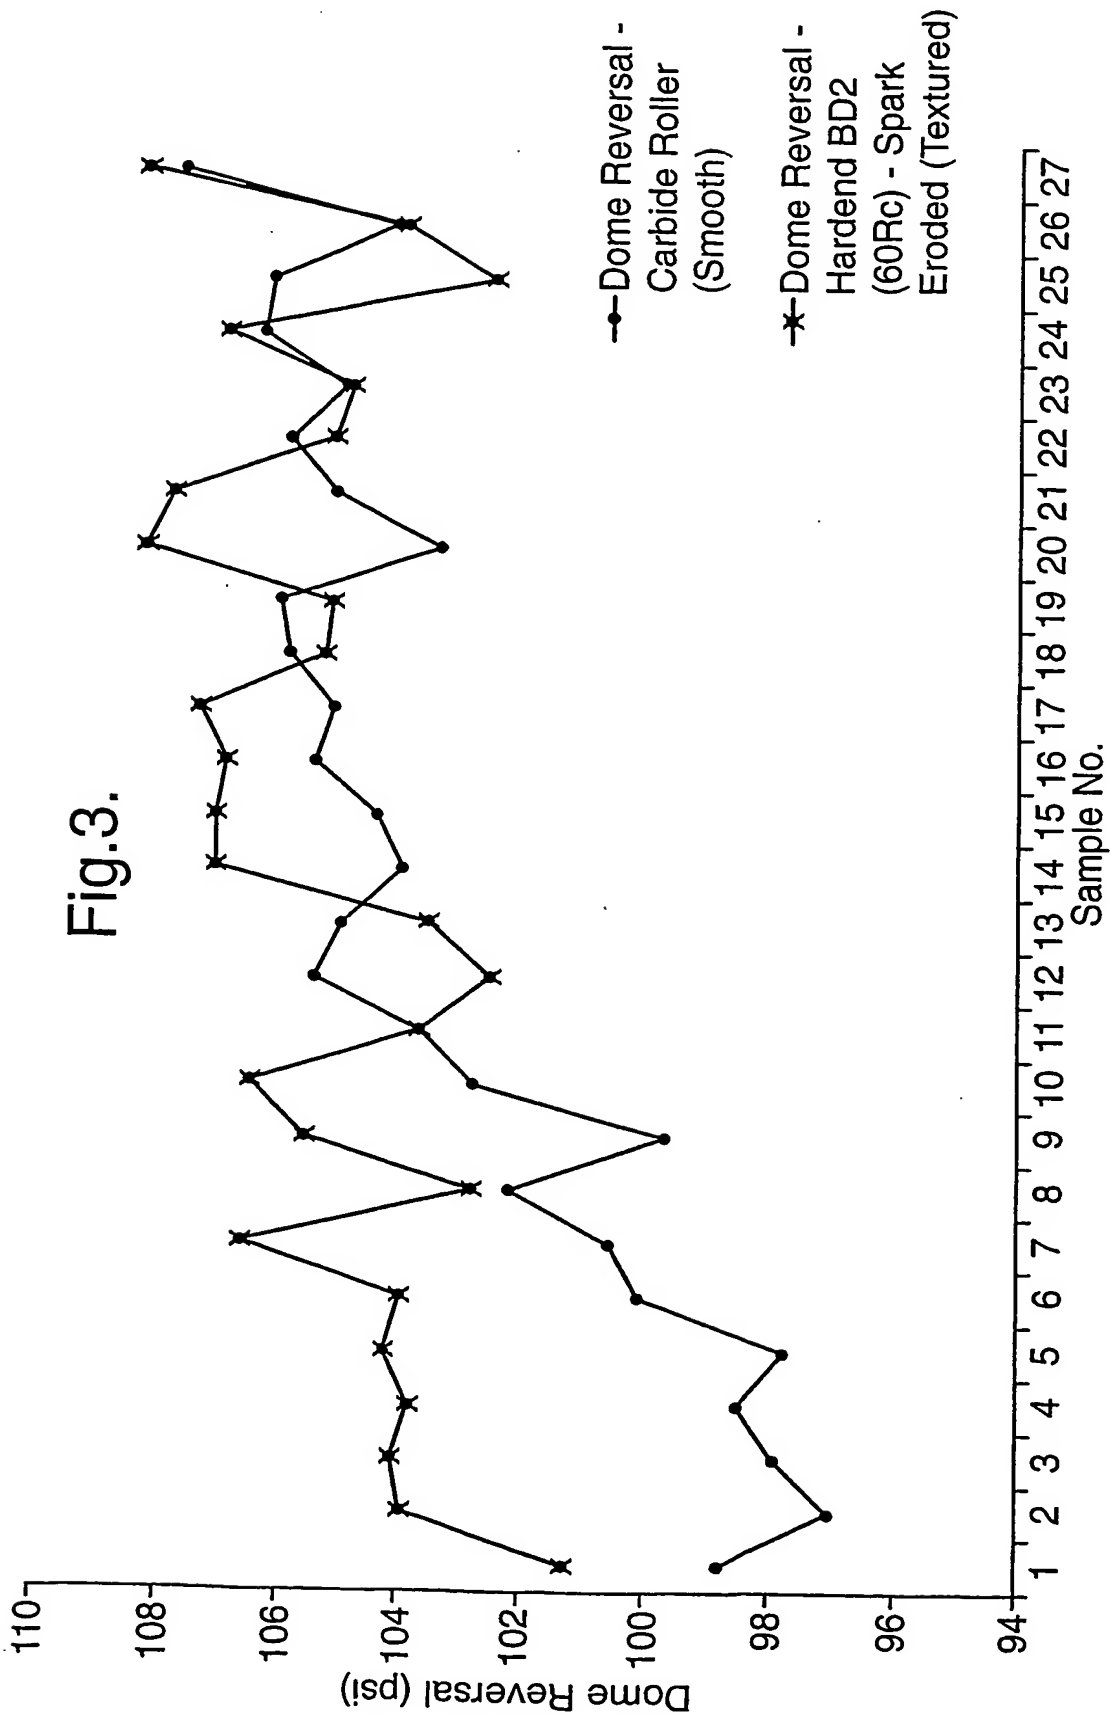

3/5






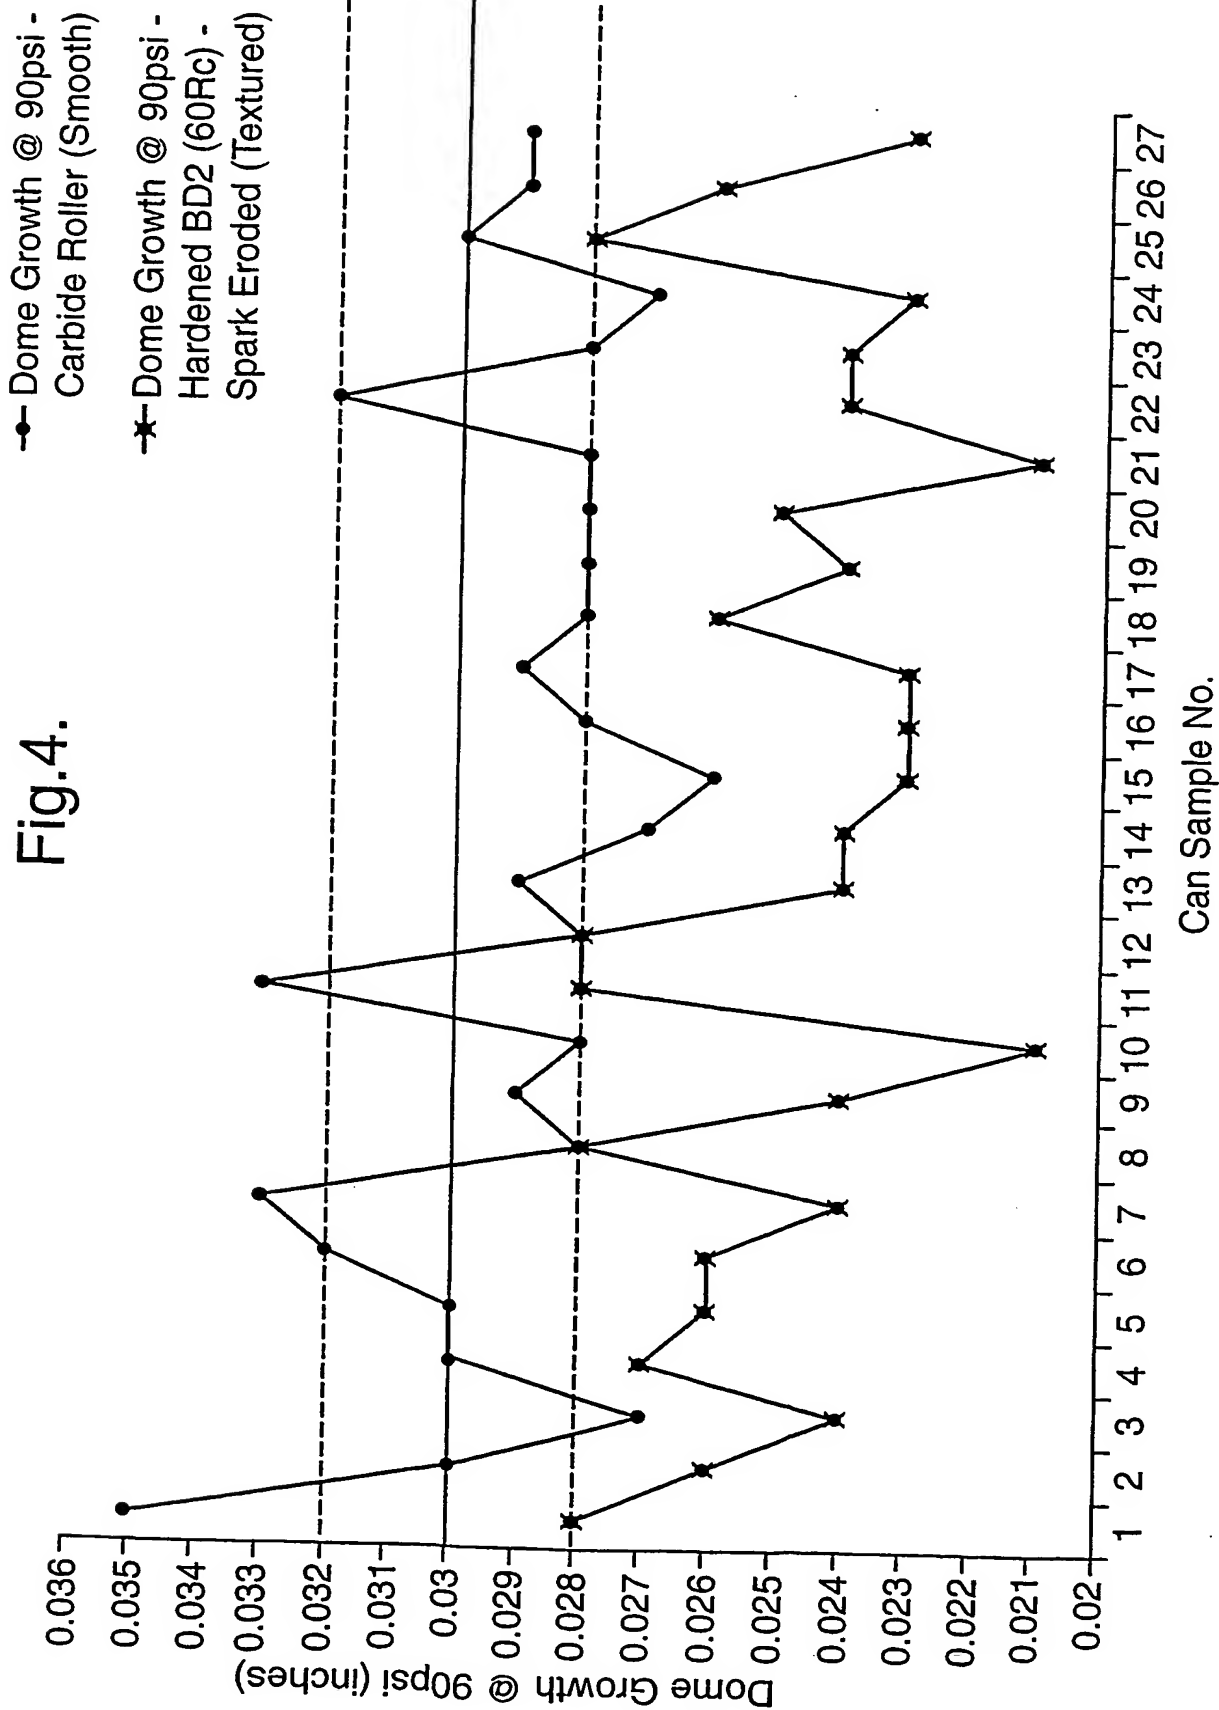


Fig.5.

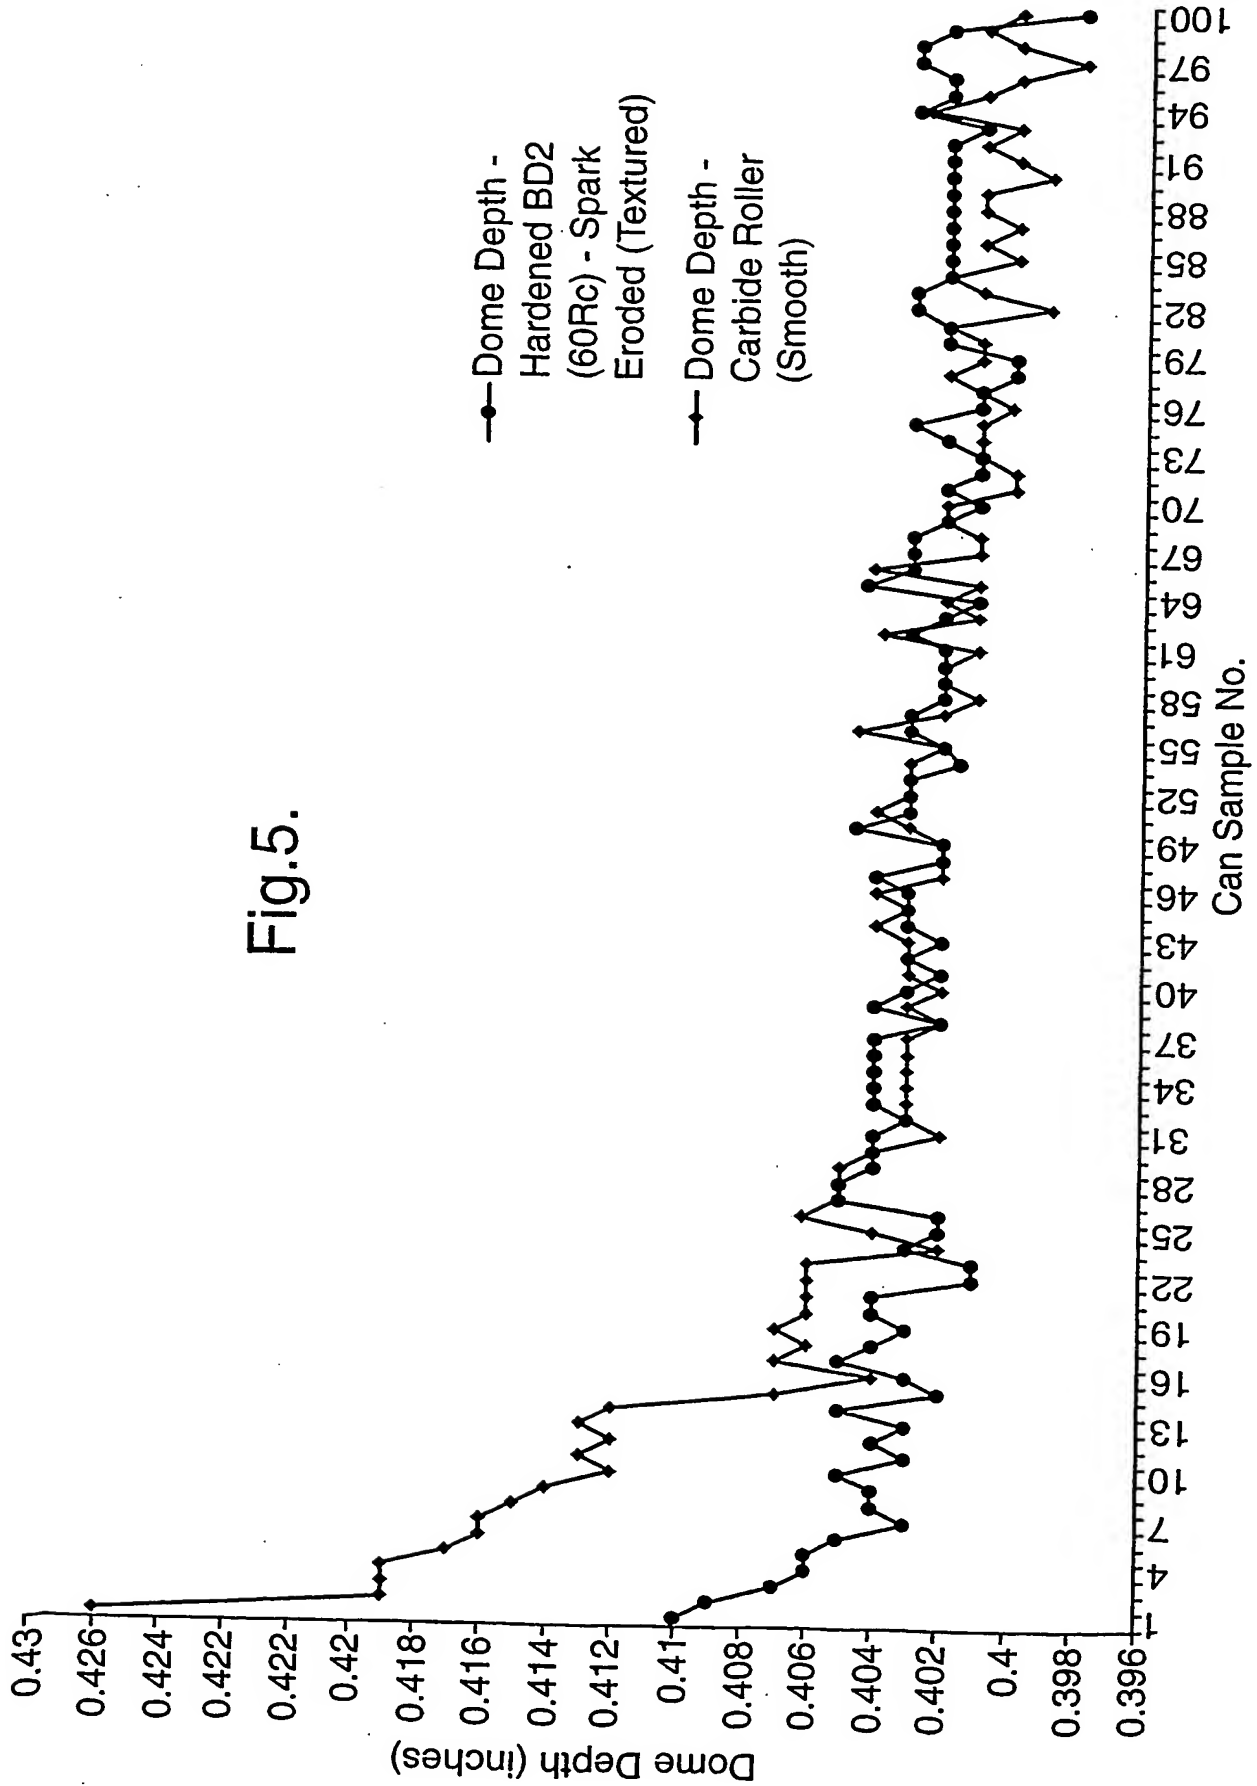

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 03/06239

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 7 B21D51/26

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B21D B65D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

EP0-Internal, WPI Data, PAJ

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 934 127 A (IHLY EUGENE F) 10 August 1999 (1999-08-10) abstract; figures	1,7
A	US 6 217 811 B1 (BÜTTNER OLAF ET AL) 17 April 2001 (2001-04-17) figures 8,9 column 1 -column 2	1,7
A	EP 0 482 586 A (BALL CORP) 29 April 1992 (1992-04-29) cited in the application abstract; figures	1,7

☐

Further documents are listed in the continuation of box C.

☒

Patent family members are listed in annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the International filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the International filing date but later than the priority date claimed

"T" later document published after the International filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the International search

15 September 2003

Date of mailing of the International search report

29/09/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Vinci, V

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 03/06239

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5934127	A	10-08-1999	AU 3983299 A WO 9958264 A1	29-11-1999 18-11-1999
US 6217811	B1	17-04-2001	DE 19611478 A1 AT 212899 T DE 59706310 D1 WO 9735705 A1 EP 0888208 A1 ES 2172779 T3 JP 2000507888 T	25-09-1997 15-02-2002 21-03-2002 02-10-1997 07-01-1999 01-10-2002 27-06-2000
EP 0482586	A	29-04-1992	US 5105973 A AT 177352 T AT 135318 T AU 653171 B2 AU 8599291 A AU 655205 B2 AU 8599391 A CA 2053590 A1 CA 2053591 A1 CN 1060821 A ,B CN 1061572 A ,B DE 69117863 D1 DE 69117863 T2 DE 69130974 D1 DE 69130974 T2 EP 0482581 A1 EP 0482586 A1 EP 0899199 A2 ES 2129396 T3 JP 3081312 B2 JP 4267733 A JP 2000190961 A MX 9101632 A1 MX 9101633 A1 US 5325696 A US 5524468 A	21-04-1992 15-03-1999 15-03-1996 22-09-1994 30-04-1992 08-12-1994 30-04-1992 23-04-1992 23-04-1992 06-05-1992 03-06-1992 18-04-1996 14-11-1996 15-04-1999 14-10-1999 29-04-1992 29-04-1992 03-03-1999 16-06-1999 28-08-2000 24-09-1992 11-07-2000 05-06-1992 05-06-1992 05-07-1994 11-06-1996